









Control panel for a Low HP cooler



CONOTEC CO., LTD.



26, Yunsan-ro, Geumjeong-gu, Busan, 46269 Rep. of KOREA TEL: +82-70-7815-8277,8289 | FAX: +82-51-819-4562 E-mail: conotec@conotec.co.kr











- ♦ Less than 3 HP used storage controller at food refrigeration and cold storage such as bakery, butcher, agricultural products and cold food.
- ◆ 4 outputs (electronic valves, compressors, fans, defrosting) and 3 external inputs (DP, LTC, HTC)
- ♦ Waterproof case designed to be installed wherever required location, installation base for easy installation.
- Compared with its existing same class: compact equipment size and larger temperature display
- ♦ Variety of configuration and operation menu-driven equipment for installers and users-oriented, eliminated the complex function buttons and icons in the form of the output display.









Where to install




[💥] Refrigerated storage for Maeil Dairy central laboratory examination conservation in Pyeongtaek, Gyeonggi-do.

Model composition

Model		FOX-eZin_02(2HP)	FOX-eZin_03(3HP)
Control output		220VAC output (4EA) Load capacity-MAX:220VAC Relay (2A, 8A, 12A, 15A)	220VAC output(4EA) Load capacity- MAX: 220VAC Relay(2A, 8A, 12A), Magnet(20A)
Input	Sensor	ΝΤΟ 10ΚΩ	
	Outer contact	DP, HTC, LTC	
Range		-55.0℃ ~ 99.9℃	
Output		Solenoid valve, COMP, Defrosting, FAN	


* Power option :110VAC / 24VAC (Control output is also changed in the same manner as the power supply voltage)

Part Names

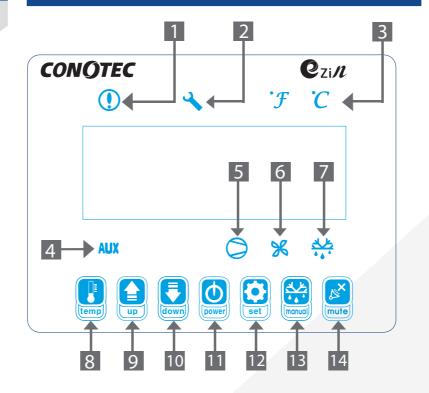

- 1 Alarm output
- 2 Error(check needed)
- 3 Temp. unit
- 4 Solenoid valve output
- 5 COMP output
- 6 FAN output
- 7 DEFROST output 8 Temperature setting 9 UP switch
 - 10 DOWN switch
- 11 Power 13 Manual defrost 14 Mute
 - 12 Device set switch

How to wire

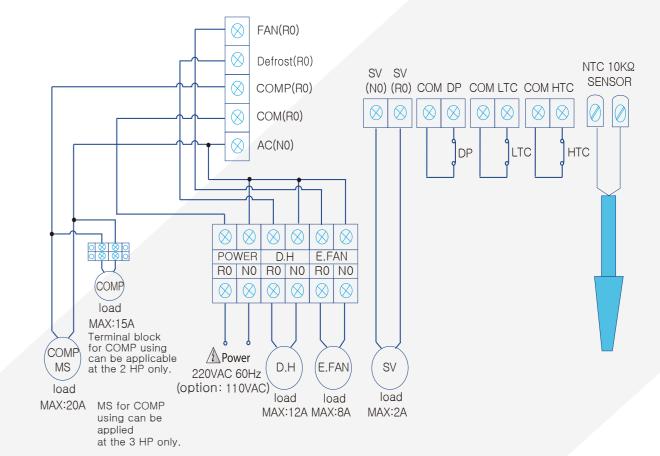



- " EASY + NEW " contains meaning that "easy-to-install, easy-to-use new types of products"
- No. 40-2015-0017125





